

# ZPTS

## Polishing - Gas Conditioning Plant

For Gas liquefaction the required gas quality is more stringent than pipeline quality, in order to produce liquefied methane (LNG), the CO<sub>2</sub> content needs to be under 100ppm . To this end, our **ZPTS® Plant** (*Zeolite Pressure Temperature Swing*) extracts all carbon dioxide (CO<sub>2</sub>) and moisture (H<sub>2</sub>O) through molecular sieve adsorption towers. The gas pressure is regulated at the inlet of the CO<sub>2</sub> polishing skid and then enter into a set of modular towers, packed with zeolite that will retain these impurities.

Once saturated, the towers can be regenerated. The ZPTS is designed with enough redundant towers that operation is uninterrupted while other towers are regenerating. This regeneration consists of 3 phases:

- **Heating:** in this phase desorption occurs, a reverse process to adsorption where the zeolite is heated with high-temperature gas to facilitate the separation of impurities from the zeolites.
- **Vacuum:** a depressurization and a series of pressure and vacuum pulses are generated that withdrawal these impurities from the towers (which can be used for power generation or other intrinsic user-end processes).
- **Cooling:** finally, the zeolite module is cooled, leaving the tower free from impurities and ready to return to the gas filtering operation.

This regeneration process can be carried out thanks to the presence of a MX 200 compressor integrated into the system and responsible for driving the necessary gas in the closed circuit that makes up each phase mentioned above


Additionally, it should be noted that our Plant presents its mobile version called ZPTS Trailer, which allows the equipment to be easily transported and relocated if required. Its special design with a self-transporting chassis allows the incorporation of carriages for movement and has hydraulic systems to raise it and position it quickly on location.

Last update: MAR/2026.




Process description:  
**Polishing (zeolite adsorption)**

1. Gas entry into the zeolite tower.
2. Adsorption of  $H_2O$  and  $CO_2$  and purified natural gas exits to the liquefaction module.
3. Regeneration of the zeolite bed by heating, vacuum and cooling.

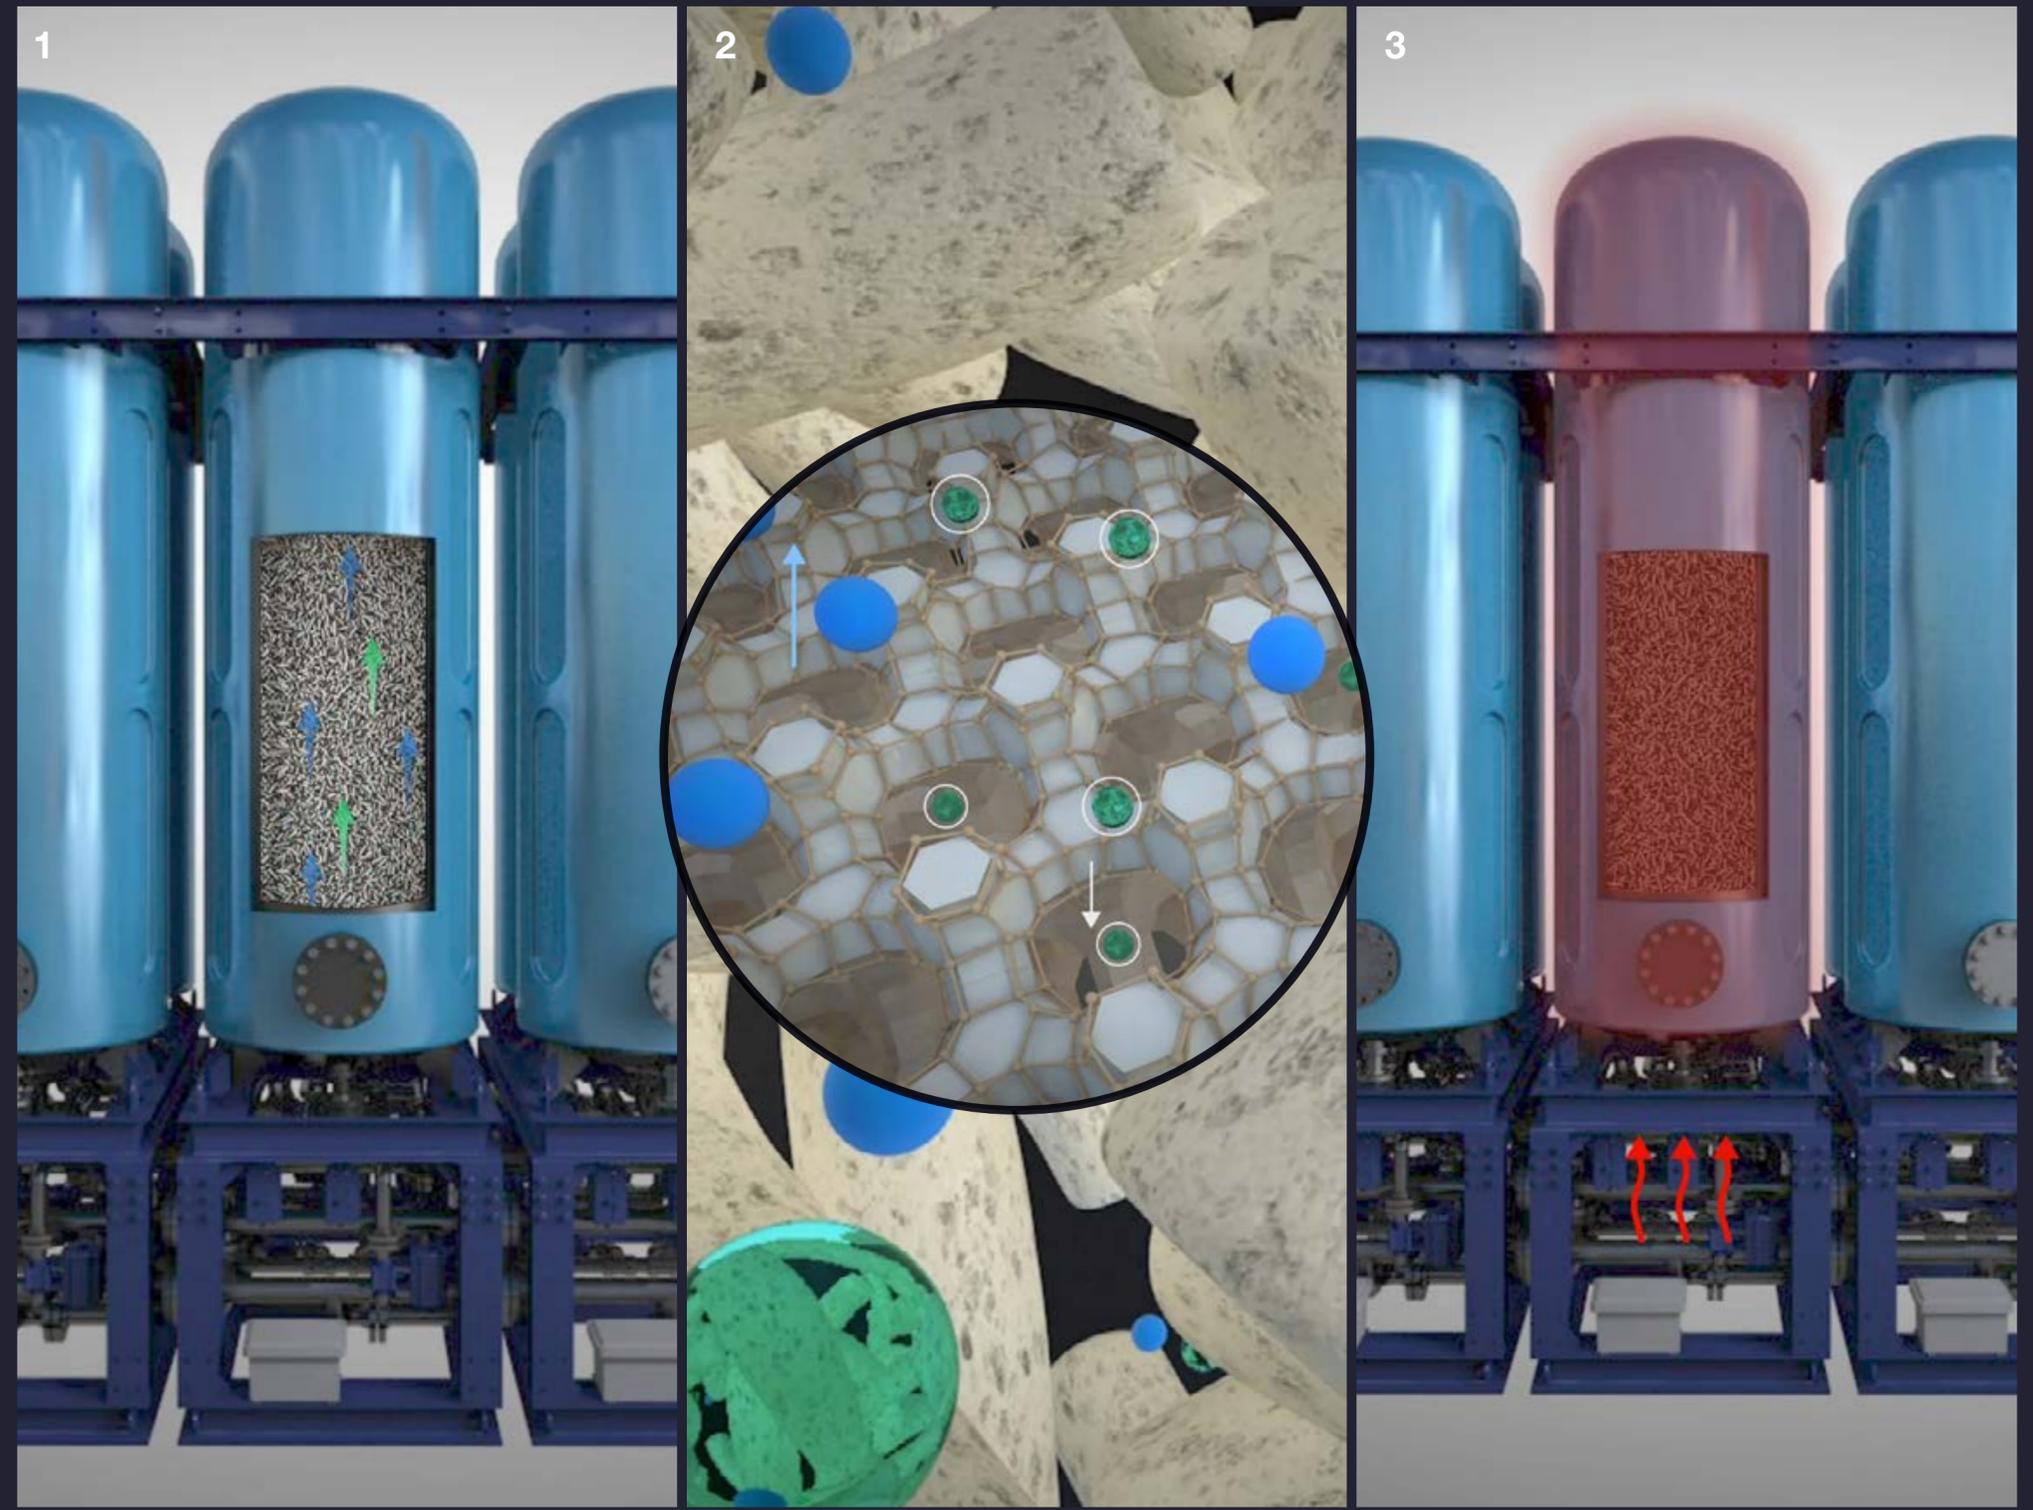

ZPTS

# Dimensions (mm)

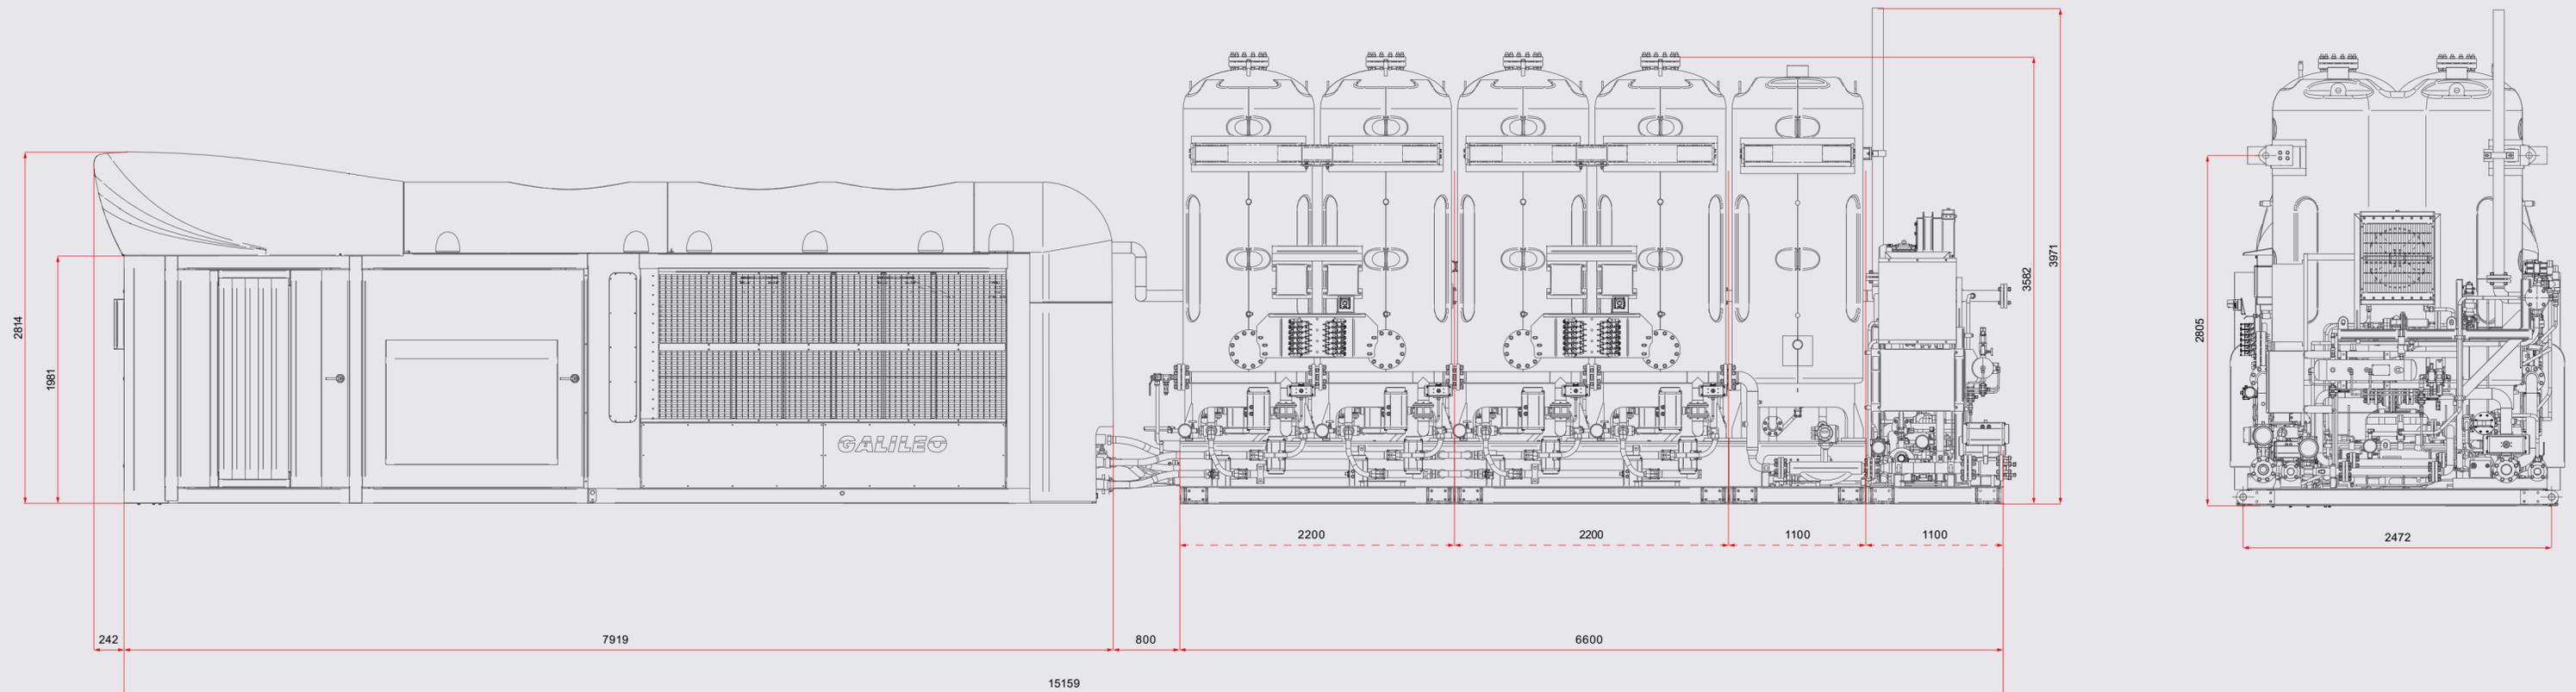

# Datasheet

		ZPTS	
<b>Electric Installed Power</b>	KW	308	
	HP	413	
<b>Main Compressors</b>		MX200	
<b>Gas characteristics</b>		Inlet	Outlet
Pressure (Min/Max)	barg	11 to 16	10 to 15
	psig	159.5 to 232	145 to 217.5
Temperature (Min/Max)	°C	10 to 50	30 to 45
	°F	50 to 122	86 to 113
Flow (Min/Max)	Sm <sup>3</sup> /h	900 to 3600	900 to 3600
	MSCFD	764 to 3056	764 to 3056
Water	H <sub>2</sub> O	Saturated	Dry
Carbon Dioxide	CO <sub>2</sub>	up to 1% @ Max Flow/up to 2% @ Min Flow	< 150 ppm
Sulfhidric Acid	H <sub>2</sub> S	up to 15 ppm	
Nitrogen	N <sub>2</sub>	No limit	
Methane	CH <sub>4</sub>	More than 80%	
Oxygen	O <sub>2</sub>	No limit	
<b>Utilities Consumption</b>	Lube Oil	0.5 L/day (Multigrade 15W40 or similar)	
		0.13 gal/day (Multigrade 15W40 or similar)	
	Air	1.2 to 3.2 Nm <sup>3</sup> /h @ 9barg (ISO-8573-1 Type [2;2;2] or higher quality) 0.7 to 1.9 MSCFD @ 130.5psig (ISO-8573-1 Type [2;2;2] or higher quality)	

All values are expressed under a regular operation and may present changes with variation of gas composition and environmental conditions.

# Datasheet

		ZPTS	
<b>Dimensions</b>	Towers	6.6m L x 2.6m W x 3.97m H	21.65ft L x 8.5ft W x 13.02ft H
	Main Module	7.9m L x 2.2m W x 2.2m H	25.92ft L x 7.22ft W x 7.22ft H
<b>Weight</b>	Towers	22.7 ton	50046 lb
	Main Module	11 ton	24250 lb
<b>Features</b>			
Intrinsecally Safe		Yes	
Monitoring		Yes, 24/7 through our Galileo DigiHub - Scada System	
Modularity		Yes	
Plug & Play		Yes	
Scalability		Yes	
<b>Electrical parameters*</b>			
Main Compressor Start System		Soft starter	

\*For lower pressures than 0.8 barg (11.6 psig), a blower skid can be incorporated before the inlet to the unit (optional).  
 All values are expressed under a regular operation and may present changes with variation of gas composition and environmental conditions.


# Tracked under Galileo DigiHub - Scada System

We don't just sell technology; we provide a service. We will be with you 24/7, monitoring key parameters through our **Galileo DigiHub - Scada System\*** and providing on-the-ground support to keep your uptime as high as possible.


Up to 99% Methane Recovery, easily tracked through a single integrated system.

Key variables from production, transportation and delivery to end user can be tracked on-line, remotely and in real time in our proprietary SCADA system.

Our integrated solution not only favors efficient troubleshooting and resolution, but it also provides a single control system for the complete operation, from inlet, to gas upgrading, to the outlet of the Virtual Pipeline.

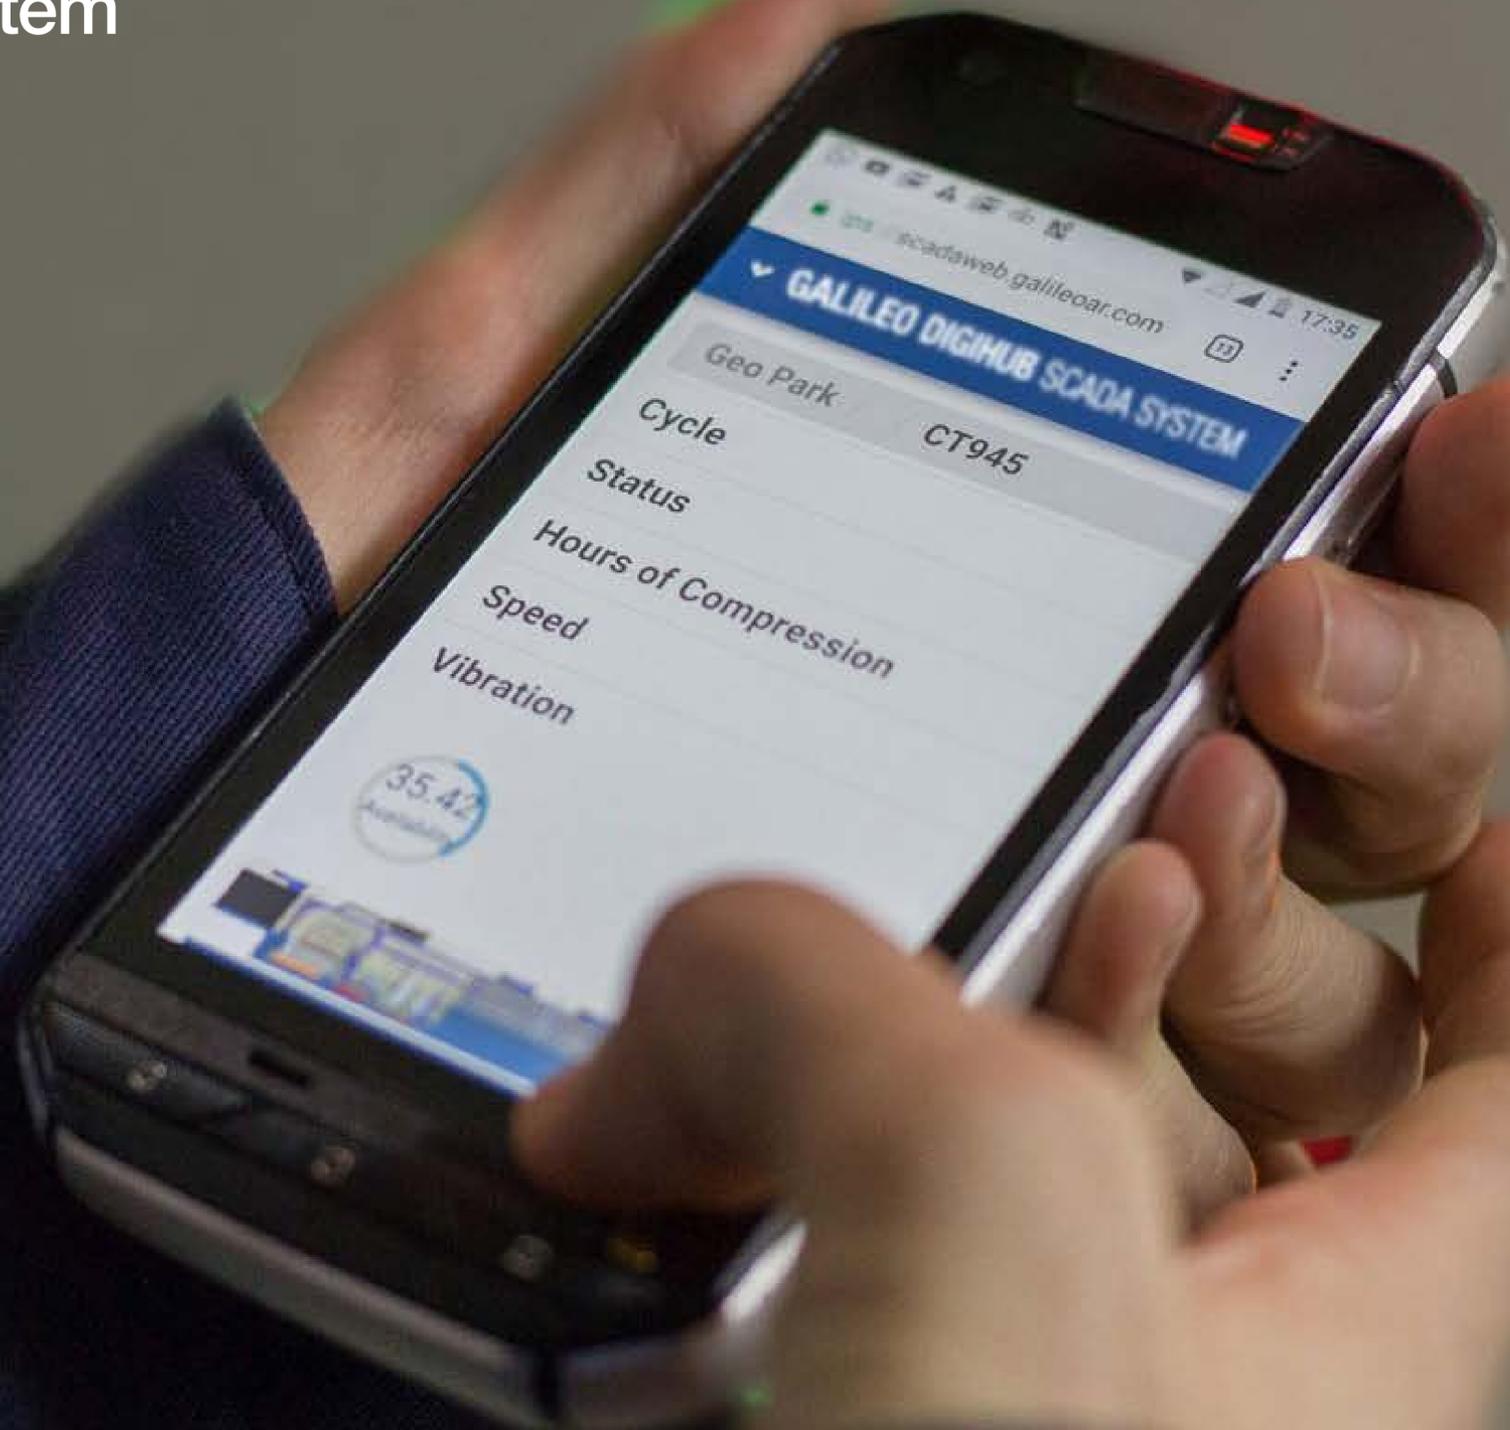

\*This is an additional service and is contracted separately.

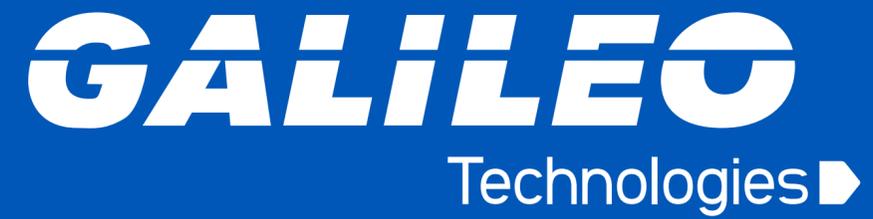

[info@galileoar.com](mailto:info@galileoar.com)

[www.galileotechnologies.com](http://www.galileotechnologies.com)

Follow us:



**New Jersey**  
333 Cedar Ave  
Middlesex, NJ 08846  
United States

**Buenos Aires**  
Av. General Paz Provincia 265  
(B1674AOA) Sáenz Peña,  
Partido de Tres de Febrero  
Pcia. de Buenos Airees,  
Argentina

**São Paulo**  
Rua Doutor Renato Paes de  
Barros, 750, Cj. 95 y 96,  
Itaim Bibi, São Paulo, SP, Brasil  
CEP 04530-001